


# CURTAIN UNIT SPECIFICATIONS

1. an ingenious design permits both conventional and sideways loading
2. the patented base structure gives maximum side opening height

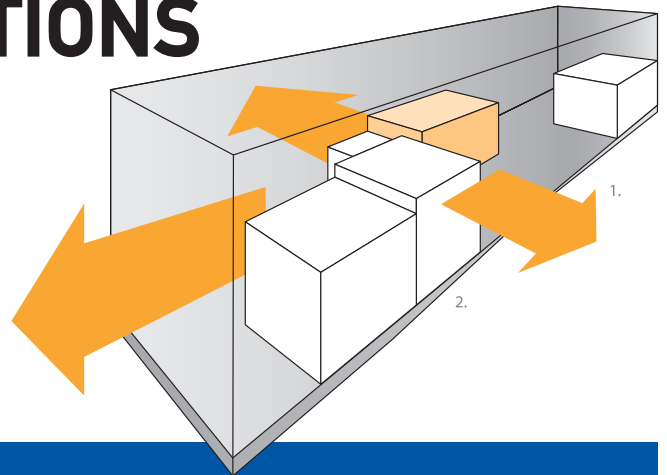

## CURTAIN UNIT TYPE A+: LIGHTWEIGHT BAMBOO FLOOR

### external dimensions

length: 13716 mm  
width: 2550 mm  
height: 2896 mm

### internal dimensions

length: 13551 mm  
width: 2450 mm  
height: 2468 mm

### door opening

door width: 2420 mm

door height: 2355 mm

### side opening dimensions

length: 12620 mm

height under pelmet: 2368 mm

### capacity

81 m<sup>3</sup>

europallet (1200mm x 800mm) 33  
iso pallet (1200mm x 1000mm) 26

### ratings

max. gross weight: 34000 kgs  
max. payload: 28085 kgs

tare weight: 5915 kgs

XL approved for high-speed train / EN 12641-2

## CURTAIN UNIT TYPE A: BIRCH FLOOR

### external dimensions

length: 13716 mm  
width: 2550 mm  
height: 2896 mm

### internal dimensions

length: 13551 mm  
width: 2450 mm  
height: 2468 mm

### door opening

door width: 2420 mm

door height: 2355 mm

### side opening dimensions

length: 12620 mm

height under pelmet: 2368 mm

### capacity

81 m<sup>3</sup>

europallet (1200mm x 800mm) 33  
iso pallet (1200mm x 1000mm) 26

### ratings

max. gross weight: 34000 kgs  
max. payload: 28130 kgs

tare weight: 5870 kgs

- ACCESSIBLE FROM 3 SIDES
- THEFT-PROOF CURTAINS WITH HEAVY DUTY WEBBING
- COMPATIBLE WITH 40FT INFRASTRUCTURE