


DRY UNIT SPECIFICATIONS

WARRANTY the paint system applied on the container surface is guaranteed against corrosion and/or paint failure for a period of five years.

All containers are guaranteed against any defects or omissions in construction, poor workmanship or defective materials for a period of two years.

All decals will be guaranteed for a period of seven years against colour fade, adhesive and peeling.

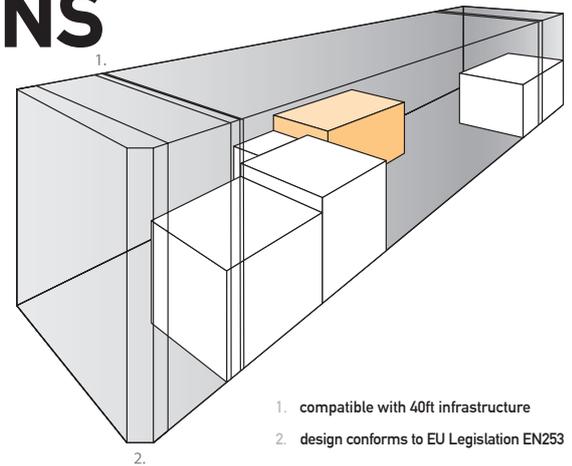

1. compatible with 40ft infrastructure
2. design conforms to EU Legislation EN253

DRY UNIT TYPE A+: LIGHTWEIGHT BAMBOO FLOOR SPECIAL INTERMEDIATES & HIGH DOORS

external dimensions
length: 13716 mm
width: 2500 mm
height: 2896 mm

internal dimensions
length: 13556 mm
width: 2438 mm
height: 2695 mm

door opening
door width: 2416 mm
door height: 2656 mm

capacity
89m³

europallet (1200mm x 800mm) 33
iso pallet (1200mm x 1000mm) 26

ratings

max. gross weight: 34000 kgs tare weight: 4320 kgs max. payload: 29680 kgs

DRY UNIT TYPE A+: LIGHTWEIGHT BAMBOO FLOOR

dimensions as above

ratings

max. gross weight: 34000 kgs tare weight: 4320 kgs max. payload: 29680 kgs

DRY UNIT TYPE A: BIRCH FLOOR

dimensions as above

ratings

max. gross weight: 34000 kgs tare weight: 4260 kgs max. payload: 29740 kgs

DRY UNIT TYPE B: BAMBOO FLOOR

dimensions as above

ratings

max. gross weight: 34000 kgs tare weight: 4660 kgs max. payload: 29340 kgs

- WATERBORNE PAINT
- VARIOUS SPECIAL DRY UNITS AVAILABLE
- ENVIRONMENTALLY FRIENDLY BAMBOO FLOOR