


# REEFER UNIT SPECIFICATIONS

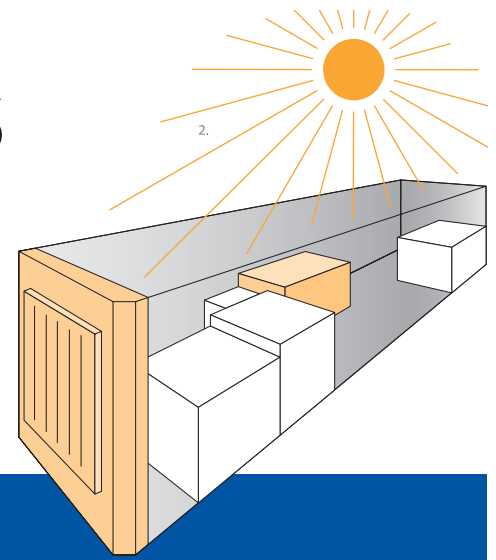

1. built-in refrigeration system that saves cargo space
2. energy-saving technology guarantees maximum refrigeration capacity

## ALL ELECTRIC REFRIGERATED CONTAINER

external dimensions  
 length: 13716 mm  
 width: 2556 mm  
 height: 2896 mm

internal dimensions  
 length: 13303 mm  
 width: 2438 mm  
 height: 2575 mm

door opening  
 door width: 2441 mm  
 door height: 2540 mm

capacity  
 83,1 m<sup>3</sup>

europallet (1200mm x 800mm) 33  
 iso pallet (1200mm x 1000mm) 26

### ratings

max. gross weight: 34000 kgs  
 max. payload: 27890 kgs  
 tare weight incl. cooling unit: 6110 kgs

## ALL ELECTRIC DOUBLE STACK REFRIGERATED CONTAINER

external dimensions  
 length: 13716 mm  
 width: 2556 mm  
 height: 2896 mm

internal dimensions  
 length: 13303 mm  
 width: 2438 mm  
 height: 2575 mm

door opening  
 door width: 2441 mm  
 door height: 2540 mm

capacity  
 83,1 m<sup>3</sup>

europallet (1200mm x 800mm) 33/66  
 iso pallet (1200mm x 1000mm) 26/52

### ratings

max. gross weight: 34000 kgs  
 max. payload: 27440 kgs  
 tare weight: 6560 kgs  
 (incl. cooling unit, tracks & loading bars)

22 moveable loading bars (max. load per bar 1000 kgs)

- OPTIONAL ADVANCED TRACK & TRACE SYSTEM
- COMPATIBLE WITH 40FT INFRASTRUCTURE
- CAPACITY TO HANDLE 33 EUROPALLETS