

SPECIFICATIONS



external dimensions

length:	12192mm
width:	2438mm
height:	1540mm

lane profile

max. width:	2130mm
max. height:	1469mm
height bar closed:	1245mm

capacity & max. car length


2 cars:	6021mm
3 cars:	3997mm
4 cars:	2986mm

ratings

max. gross weight:	12000kg
max. payload:	10000kg
tare weight:	2000kg

www.vucaframe.com

- COMPATIBLE WITH 40FT CONTAINER INFRASTRUCTURE
- MAX. CAR HEIGHT 1469mm
- MAX. SEVEN HIGH STACKING
- HIGH STRENGTH STEEL, HIGH DURABILITY, LONG LIFE
- GOOSENECK TUNNEL DESIGN

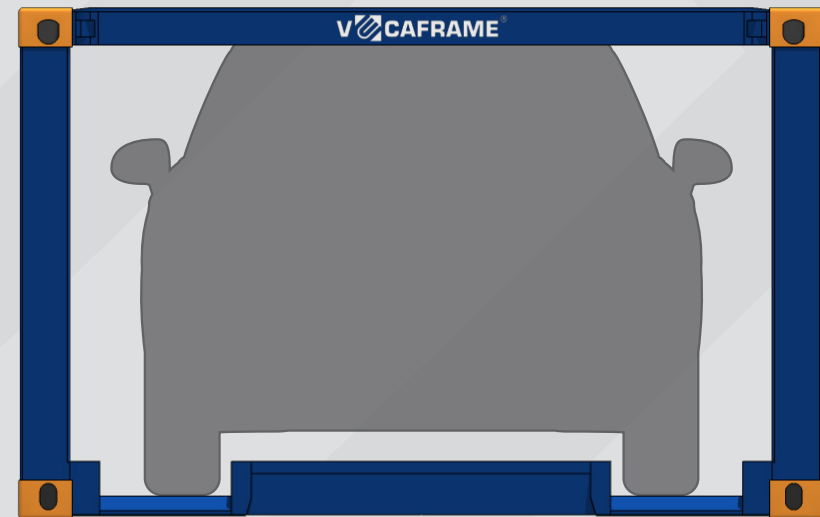

UNIT45
INTERMODAL INNOVATORS

EFFICIENT STORAGE



VUCAFRAME®
Reachstacker
yard

2400 [cars/ha]




Conventional
Parking
lot

890 [cars/ha]



Gantry stack
yard

4400 [cars/ha]



Multi Storey
car park

1900 [cars/ha]



www.vucaframe.com

- HIGH DENSITY STORAGE
- INSTANT CAPACITY, NO EXPENSIVE INFRASTRUCTURE REQUIRED
- INCREASE OR DOWN SIZE YOUR STORAGE CAPACITY WITH DEMAND
- CARS ARE WELL PROTECTED, REDUCED DAMAGE AND THEFT



UNIT45
INTERMODAL INNOVATORS